



# CSC-CONTAINER

*Collection - Sanitisation - Composting*



Compost  
**SYSTEMS**



- ✓ Modular independent solution
- ✓ Intelligent process control via Internet
- ✓ GPS tracking
- ✓ Decentralised and odour free collection
- ✓ Odour free composting
- ✓ Fully documented sanitisation
- ✓ Controlled temperature monitoring

### TECHNICAL DATA

Outside dimension	CSC-20	CSC-30
Length	~5.85 m	~6.40 m
Width	~2.20 m	~2.50 m
Height	~2.20 m	~2.48 m
Capacity	19 m <sup>3</sup>	29 m <sup>3</sup>
Maximum input weight	12 t	17 t
Aeration technology	Active positive aeration	
Power supply	230 V	
Installed Power	80 W	
Power consumption	max. 61 W	
Odour reduction	Semi-permeable membrane ➔ 95 % odour reduction through a pendulum flap	
Unloading	GPS	
Localisation	GPRS	
Connection	Temperature	
Measurement of	Filling level	
	Open/closed lid	
	Pressure	


Container framework build according to DIN 30722  
 Option: Made in stainless steel (floor, side walls)



GPRS



- ✓ Process control
- ✓ Temperature monitoring/trend
- ✓ Sanitisation monitoring
- ✓ Filling level
- ✓ Container position
- ✓ Open/closed lid monitoring
- ✓ Fault alarm

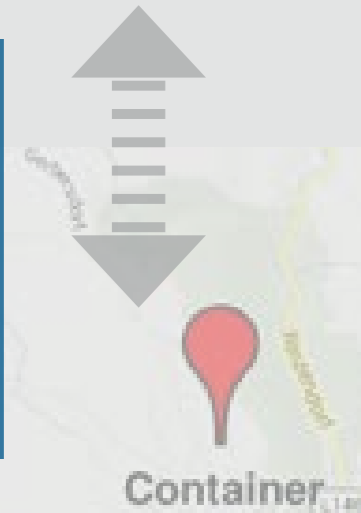

*Call us to arrange a trial rental.*

*Compost*  
**SYSTEMS**

Maria-Theresia-Straße 9 4600 Wels telephone +43/7242/350 777-0 fax 20  
[www.compost-systems.com](http://www.compost-systems.com), [info@compost-systems.com](mailto:info@compost-systems.com)