



# KA 4018-3.5 mobile

## Mobile Screening Station

### Powerful - Compact - Affordable - Mobile

The KA 4018-3.5 in the mobile version is being delivered on a chassis, which ensures a flexible positioning on the plant.

Feeding of the drum is executed by a bunker with a volume of 3,5 m<sup>3</sup> and a FU-controlled conveyor belt.

An optional air separator, mounted on the discharge conveyor of the screening station, separates the light fraction and directs it into a special container before the screen overflow is recirculated into the rotting process.

## Technical data

**Driving system:** electric  
Hopper conveyor 0.75 kW  
Screening drum 11.0 kW

**Sieve drum:**  
Driving system with endless drive chain  
Drum length 410 cm  
Drum diameter 180 cm  
Screen surface 22 m<sup>2</sup>

**Hopper:** 3,5 m<sup>3</sup>  
Conveyor width 80 cm  
Filling height 320 cm

**Capacity:** up to 60 m<sup>3</sup>/h

### Options:


**Discharge conveyor:** 3.0 kW  
Length 300 cm  
Width 65 cm

**Windsifter:** 7.5 kW

**Central lubrication**

**Magnetic separator**

**Wireless remote control**

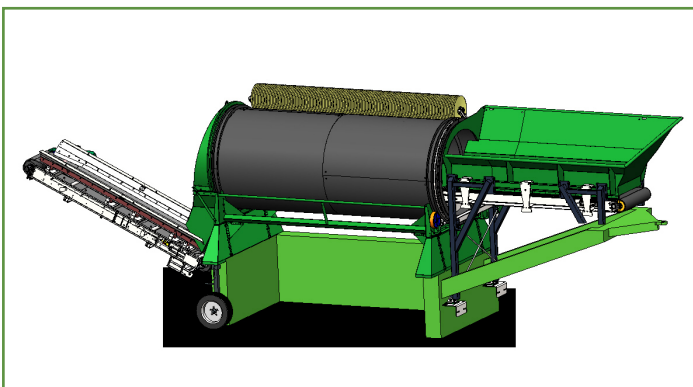

All information is subject to change without notice. Printing errors reserved.